


# Whirlwind Quilt




Approximate Finish Size: 55" x 68"

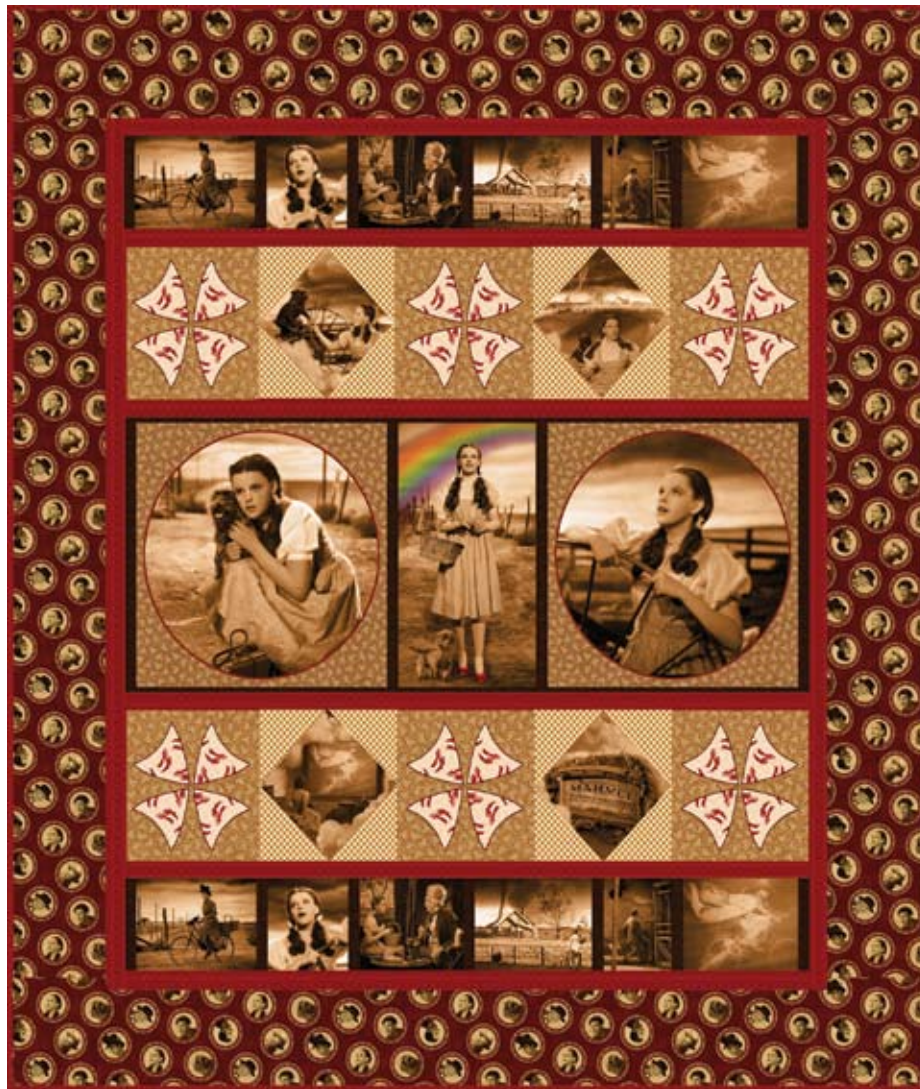

25649-A  
2 panels



20422-A  
½ yard



20427-E  
¼ yard




25644-M  
2 yards



20419-A  
1 yard



20423-A  
⅔ yard



20420-A  
3½ yards - Backing



20428-M  
1¼ yards  
Sashings and Binding

# Whirlwind Quilt

Designed by Jean Ann Wright

Skill Level: Beginner

Quilt Size: Approximately 55" x 68"

Block Size: 9"

## Fabric Requirements:

2 panels 25649-A

1 yd 20419-A, block A

½ yd 20422-A, block A

¼ yd 20427-E, block B

⅔ yd 20423-A, block B

1¼ yd 20428-M, sashings and binding

2 yd 25644-M, borders

3½ yd 20420-A, backing fabric

## Cutting:

(1) strip 17½" x 42½" 25649-A fussy cut with Dorothy circles and rainbow

(2) strips 6½" x 42½" 25649-A fussy cut film clip scenes

(4) 6⅞" squares 20419-A fussy cut scenes on point

(8) 5⅜" squares 20422-A cut in half on diagonal once to yield 16 triangles

(24) whirlwind blades 20427-E from pattern provided for blocks B

(6) 9½" x 8¾" rectangles 20423-A for blocks B

(6) 1½" x 43¼" strips 20428-M for horizontal sashings

(2) 1½" x 60" strips 20428-M for vertical sashings

(4) 7½" x 60" strips 25644-M for borders

(7) 2¼" x width of fabric 20428-M strips for binding

## Sewing:

1. Block A : Sew a 20422-A triangle to each side of the four 20419-A fussy cut squares. Make 4. (See Figure 1)

2. Block B: Using brown thread and a wide buttonhole stitch appliqué 4 whirlwind blades 20427-E to each of the six 20423-A squares. Make 6. (See Figure 2)

Figure 1






Figure 2



3. Sew a horizontal red sashing strip 20428-M to each side of the 3 fussy cut film strip panels. Trim red sashing strips to fit the same size as the panels. Make 1 wide center film strip row and 2 narrow rows for the top and bottom of the quilt.

4. Sew 2 Blocks A and 3 Blocks B into a row. (You may need to trim each block B down slightly to adjust the row of blocks to fit the width of the center film strip rows.) (See Figure 3)

Figure 3

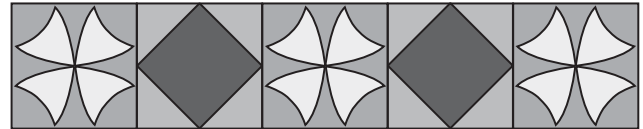

5. Alternate the 3 film strip rows and the 2 block rows to complete the center area of the quilt.

6. Measure the quilt top from top to bottom at the center of the quilt. Cut the 2 long red sashing strips 20428-M to this measurement. Sew a long red horizontal sashing to each side of the center of the quilt.

7. Trim the vertical borders 25644-M to the same measurement as the long red sashings. Sew the vertical borders to opposite sides of the quilt top.

8. Measure the quilt from side to side at the center. Cut the top and bottom borders 25644-M to this measurement. Sew the borders in place to complete the quilt.

## Finishing:

1. Quilting: Sew the quilt backing into a 64" x 74" rectangle. Layer the quilt backing, batting and quilt top. Baste the layers together then quilt as desired.

2. Binding: Sew the binding strips into one long strip with small ends to small ends. Fold in half lengthwise and press on fold line. Pin and sew raw edges of binding to raw edges of top and quilt. Turn folded edge to back of quilt and stitch in place.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.